

12. INSTALLATION

12.1 ENTFERNEN DER VERPACKUNG




Das Gerät auspacken, dafür die Schrauben, mit denen sie an der Palette befestigt ist, lösen. Das gesamte Verpackungsmaterial ist recycelbar und muss gemäß der gesetzlichen Verordnungen des Nutzerlandes entsorgt werden; achten Sie darauf, die „Plastiksäcke“ zu vernichten, da sie eine Gefahrenquelle (Ersticken) darstellen, wenn Kinder damit spielen.



ACHTUNG

Die Handhabung der Ausrüstung darf ausschließlich mit einem Gabelstapler mit ausreichender Leistung (in Bezug auf das Gewicht der Ausrüstung) und von qualifiziertem Personal durchgeführt werden: während dieses Vorgangs muss die Ausrüstung auf der bereitgestellten Palette positioniert werden.

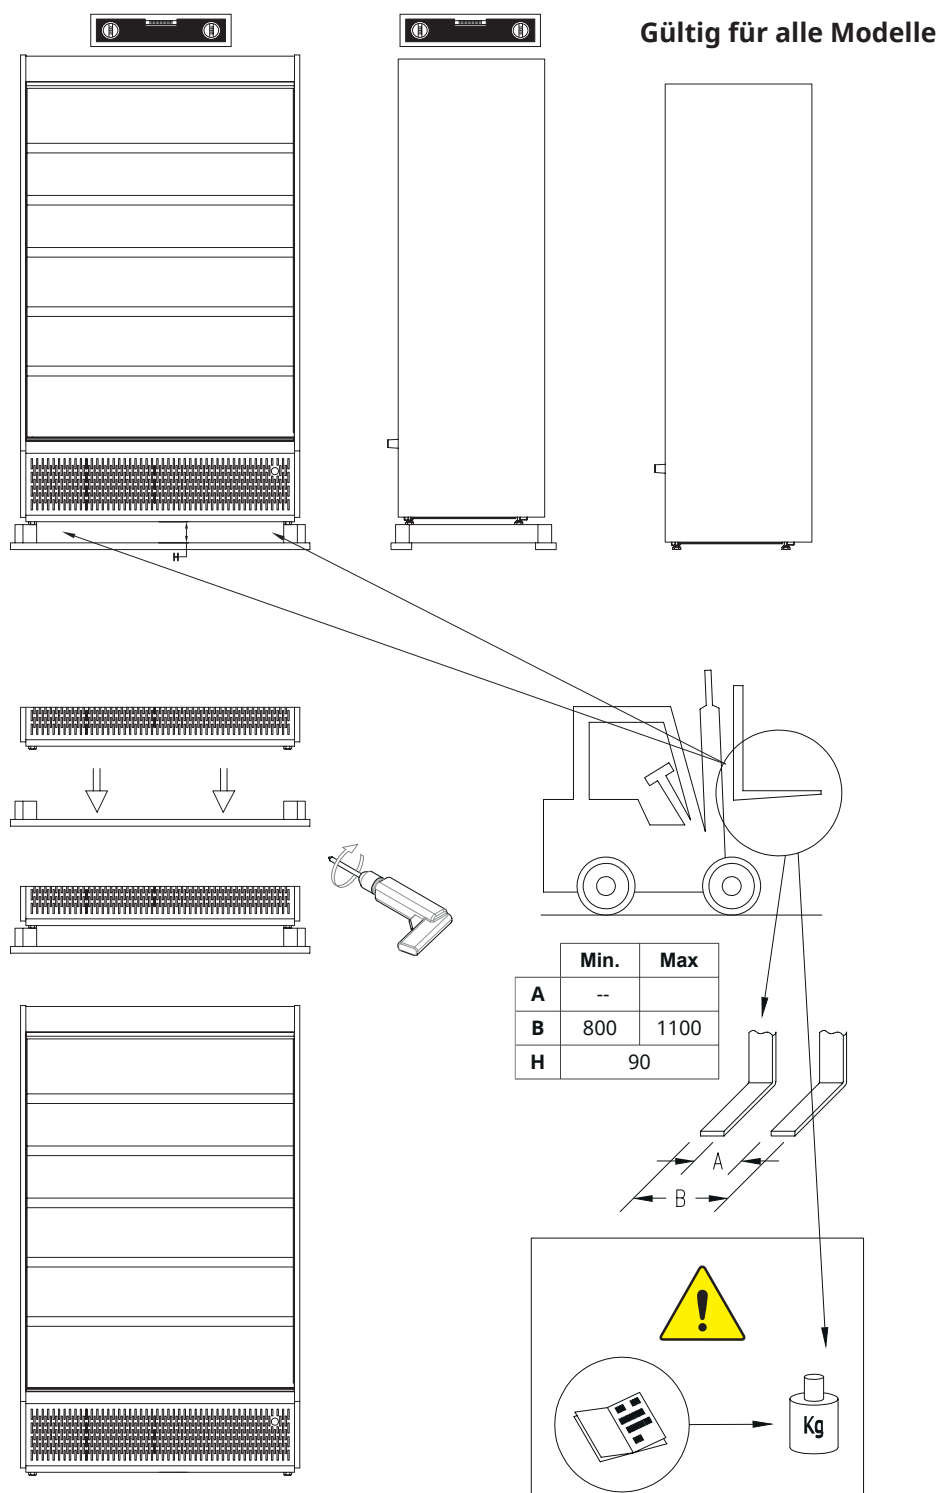

12.2 UMGEBUNGSBEDINGUNGEN



ACHTUNG

Zur Installation eignet sich ein trockener, belüftbarer Raum. Es ist wichtig, dass die Einheit Kompressor/Kondensator einen freien Luftaustausch besitzt, demzufolge dürfen die Lüftungszonen nicht durch Schachteln oder anderes versperrt werden. Das Gerät muss fern von Wärmequellen (Radiatoren, Öfen jeglicher Art, usw.) und fern vom Einfluss kontinuierlicher Luftströme (z.B. verursacht durch Ventilatoren, Öffnungen von Klimaanlage, usw.) positioniert werden. Sollte die Installation in der Nähe einer Wärmequelle unvermeidlich sein, so muss eine geeignete isolierende Platte vorgesehen werden. Vermeiden Sie außerdem die direkte Sonneneinstrahlung; dies führt zu einem Temperaturanstieg im Inneren des Kühlraums mit negativen Auswirkungen auf die Funktionstüchtigkeit und den Energieverbrauch. Der Apparat darf nicht im Freien und im Regen verwendet werden.

12.3 ELEKTRISCHER ANSCHLUSS



ACHTUNG

Kontrollieren, dass die Netzspannung der auf dem Kennschild des Geräts angeführten Kennzeichnungsschildes entspricht und die geforderte Leistung angemessen ist. An der Steckdose prüfen, dass beim Start des Kompressors die Versorgungsspannung der Nennspannung entspricht ($\pm 10\%$). Die Verbindung zwischen Steckdose und Stecker muss direkt sein; die Verwendung von Adaptern oder Zwischensteckern ist verboten. Der Versorgungsstecker der Anlage muss mit einer Versorgungsnetz-Trennvorrichtung ausgestattet sein (auf die Last abgestimmt und konform mit den geltenden Normen), die im Falle der Überspannungskategorie III (3) die vollständige Abtrennung garantiert und daher den Schutz der Kreise gegen Erdungsstörungen, Überlastungen und Kurzschluss sicherstellt. Das Anschlusskabel nicht an einem Durchgang positionieren.



ACHTUNG

Es wird daran erinnert, dass die **Erdung erforderlich und gesetzlich** vorgeschrieben ist.


12.4 POSITIONIERUNG

12.4.1 NIVELLIERFÜßSEN



ACHTUNG

Das Gerät ist mit höhenverstellbaren Nivellierfüßen ausgestattet; es **ist unbedingt notwendig**, das **Gerät** nach der Positionierung auf dem Boden auszurichten.

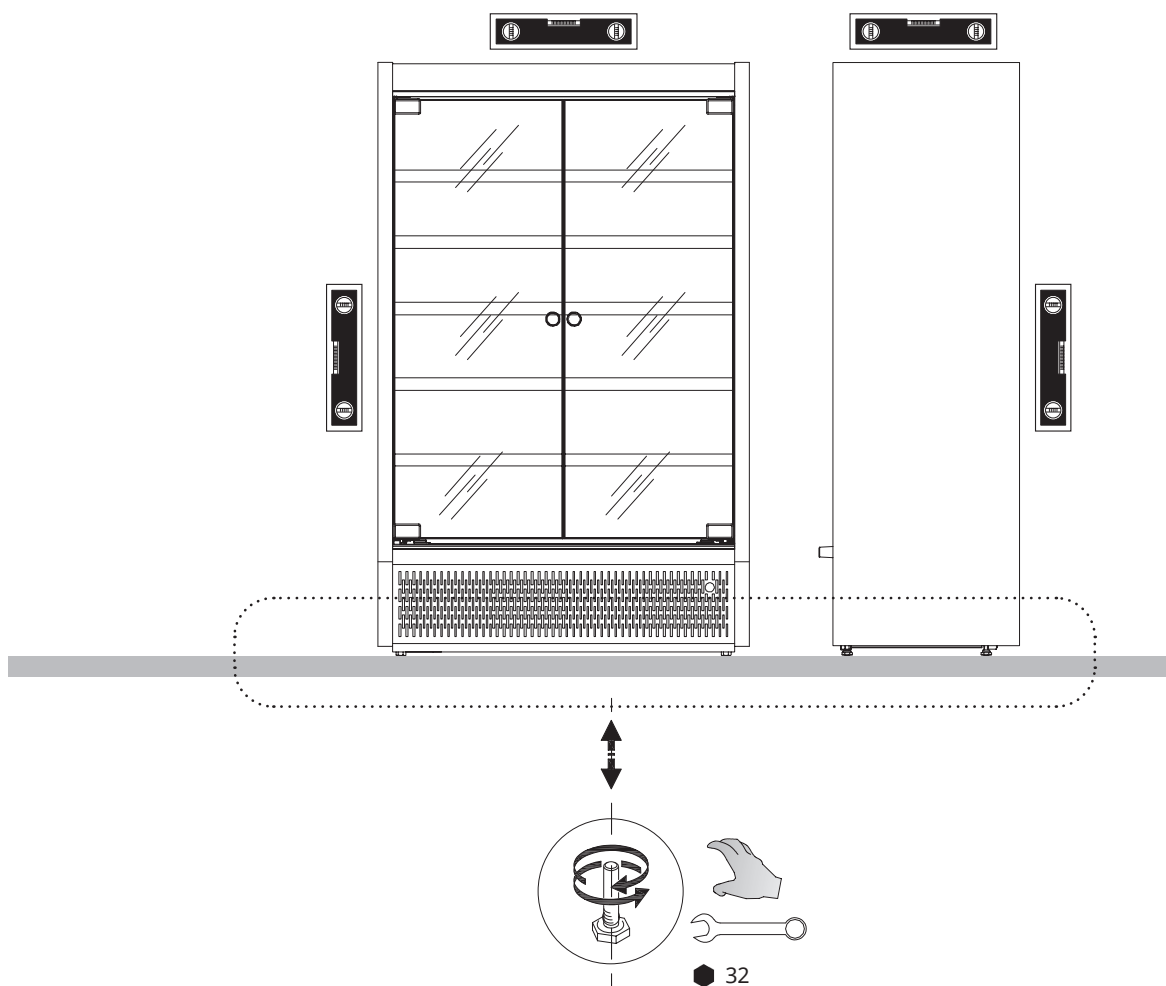


12.4.2 SCHWENKBARE RÄDER MIT BREMSE (OPTIONAL)





ACHTUNG

Es ist **absolut notwendig** das **Gerät nach die Positionierung auf den Boden** zu stabilisieren.

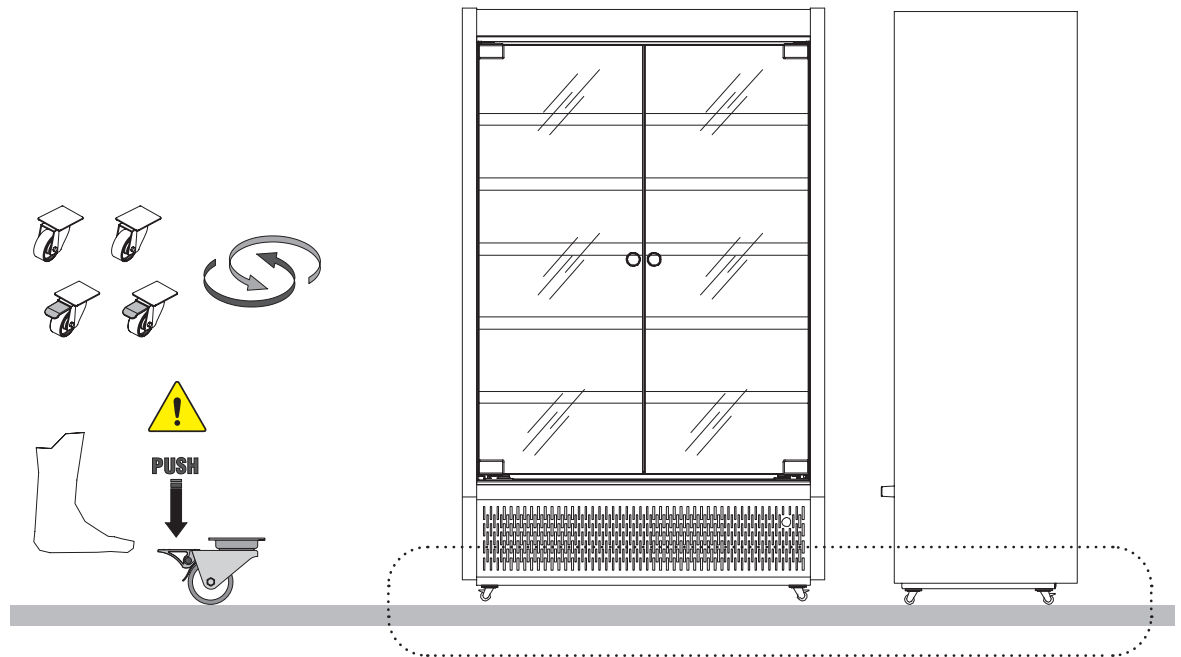

**ACHTUNG**

Es ist grundlegend für eine korrekte Installation des Geräts, die angegebenen Abstände (mm) zu beachten. Es ist **unbedingt notwendig** die im Lieferumfang enthaltenen Abstandhalter an der Rückseite zu montieren.

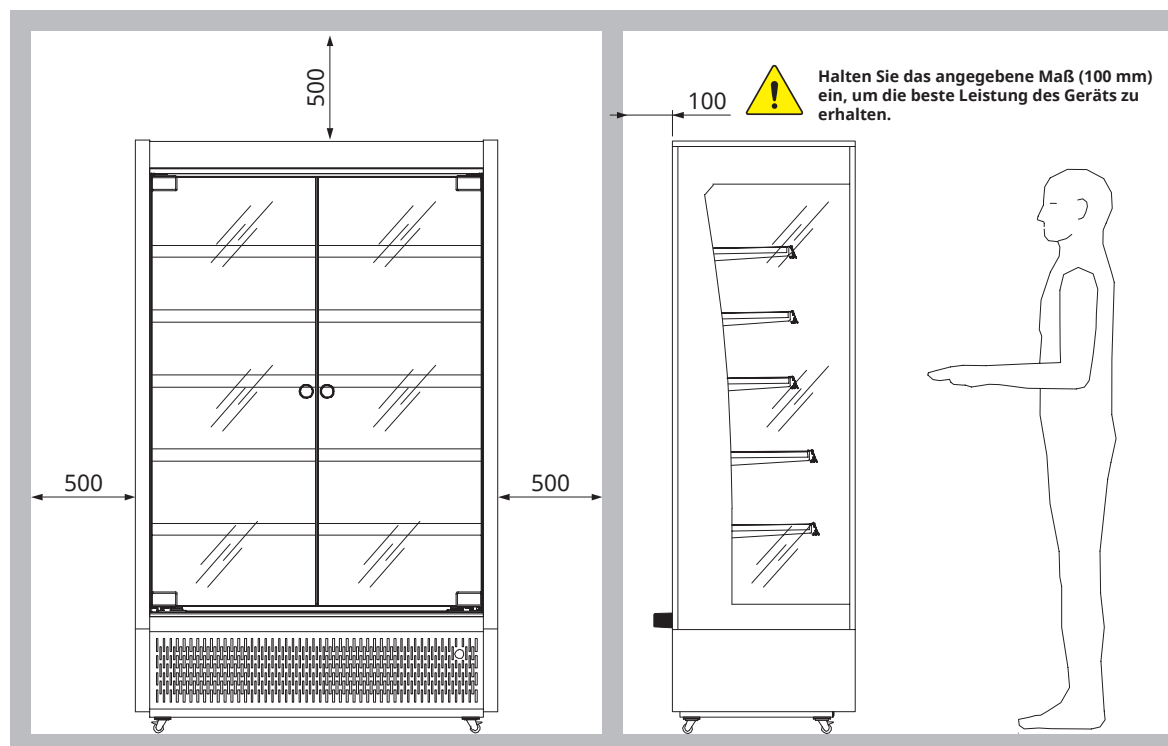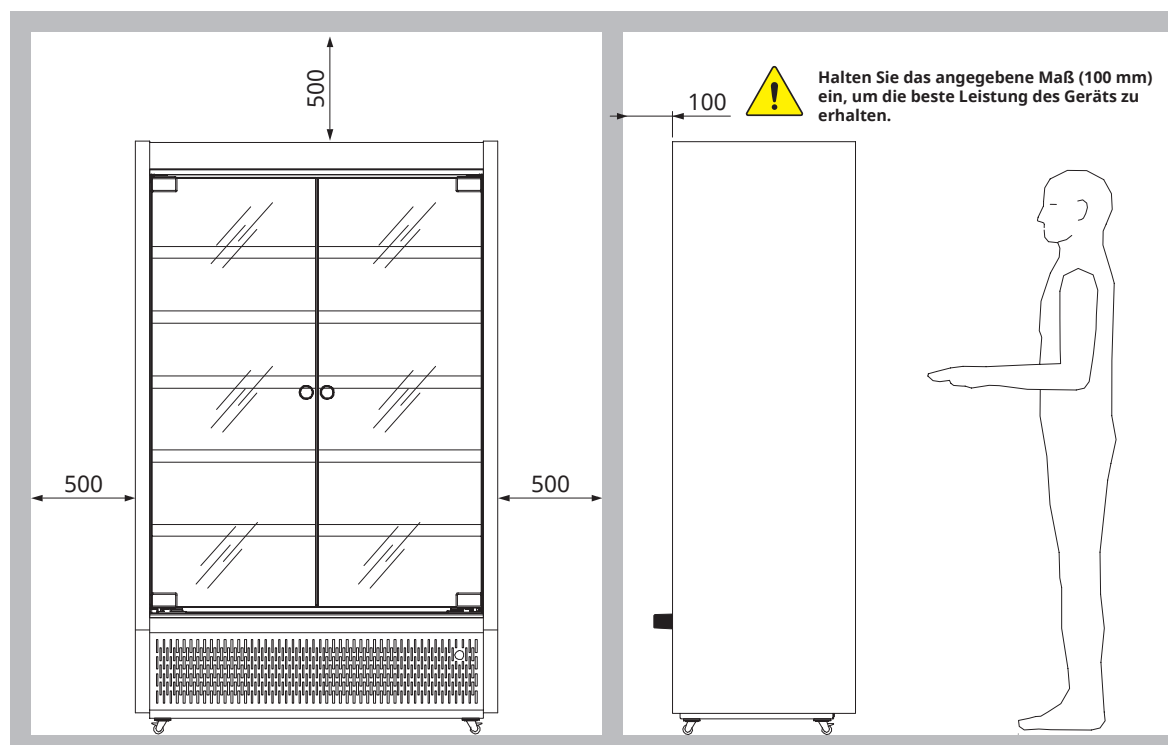



Manuelle selbstaufrollende Abdeckung



ACHTUNG

ACHTUNG

Öffnen und schließen Sie manuell ohne Gewaltanwendung und stellen Sie ein vollständiges/korrektes Schließen sicher; wird die Klappe unvollständig/falsch geschlossen, so wirkt sich dies auf die Leistungen des Geräts aus und die übermäßige Ansammlung von Eis an den Innenwänden.

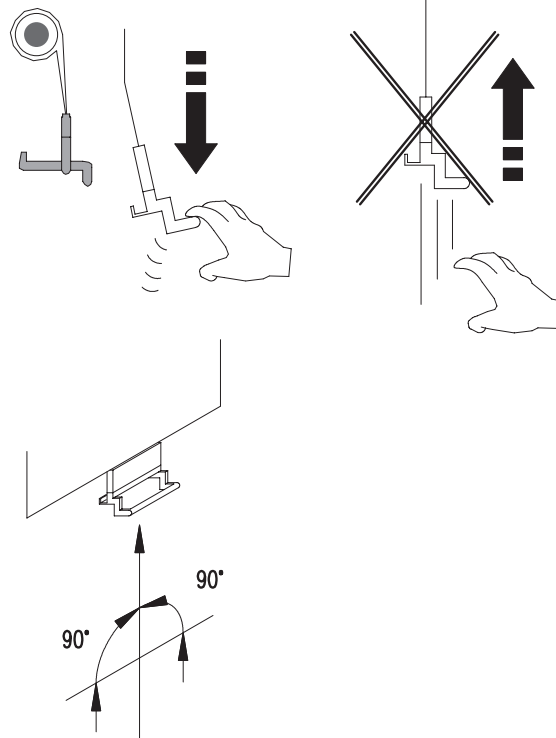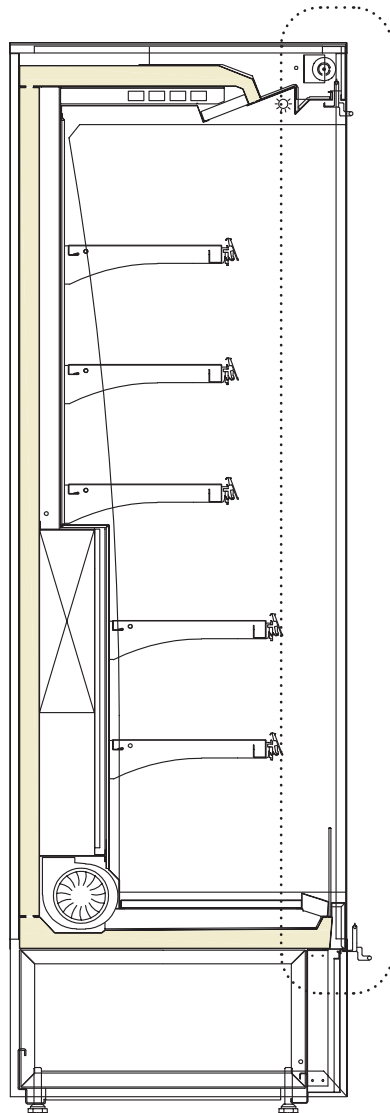

13. AUFBAU

Das Gerät besteht aus einem einzigen Möbel, auf dem alle funktionellen Vorrichtungen befestigt sind, die benötigt werden, um das Gerät zu einem professionellen und für seinen Verwendungszweck geeigneten Gerät zu machen.

Das Gerät besteht aus:

Kühlung	Belüftet
Installation	Plug-in - Abnehmbare Kondensateinheit Abgesetzte Kondensateinheit (optional)
Steuertafel	Elektronisch
Verstellbare Ausstellungsregale	
Beleuchtung	OPEN Obere LED
	Regale-LED (optional)
	SGD Obere LED
	Regale-LED (optional)
Schließsystem	GD Vertikale LED
	OPEN Manuell aufrollbarer Vorhang
	SGD Glastüren einzeln
Bewegung	GD Doppelglastüren
	Höhenverstellbare Füße
Automatisches Verdampfungssystem des Kondenswassers	Schwenkbare Räder mit Bremse (optional)
	Nur Plug.in



OPEN



SGD



GD

12. INSTALLATION

12.1 UNPACKING




All packaging materials are recyclable and should be disposed of in accordance with local regulations. All packaging materials are recyclable and should be disposed of in accordance with the local regulations. Please destroy "plastic" bags to prevent them from becoming hazardous to children (suffocation).



ATTENTION

Handling of the equipment must only be performed using a forklift truck of adequate power (with respect to the weight of the equipment) and operated by qualified personnel: during this operation the equipment must strictly be positioned on the appropriate pallet supplied.

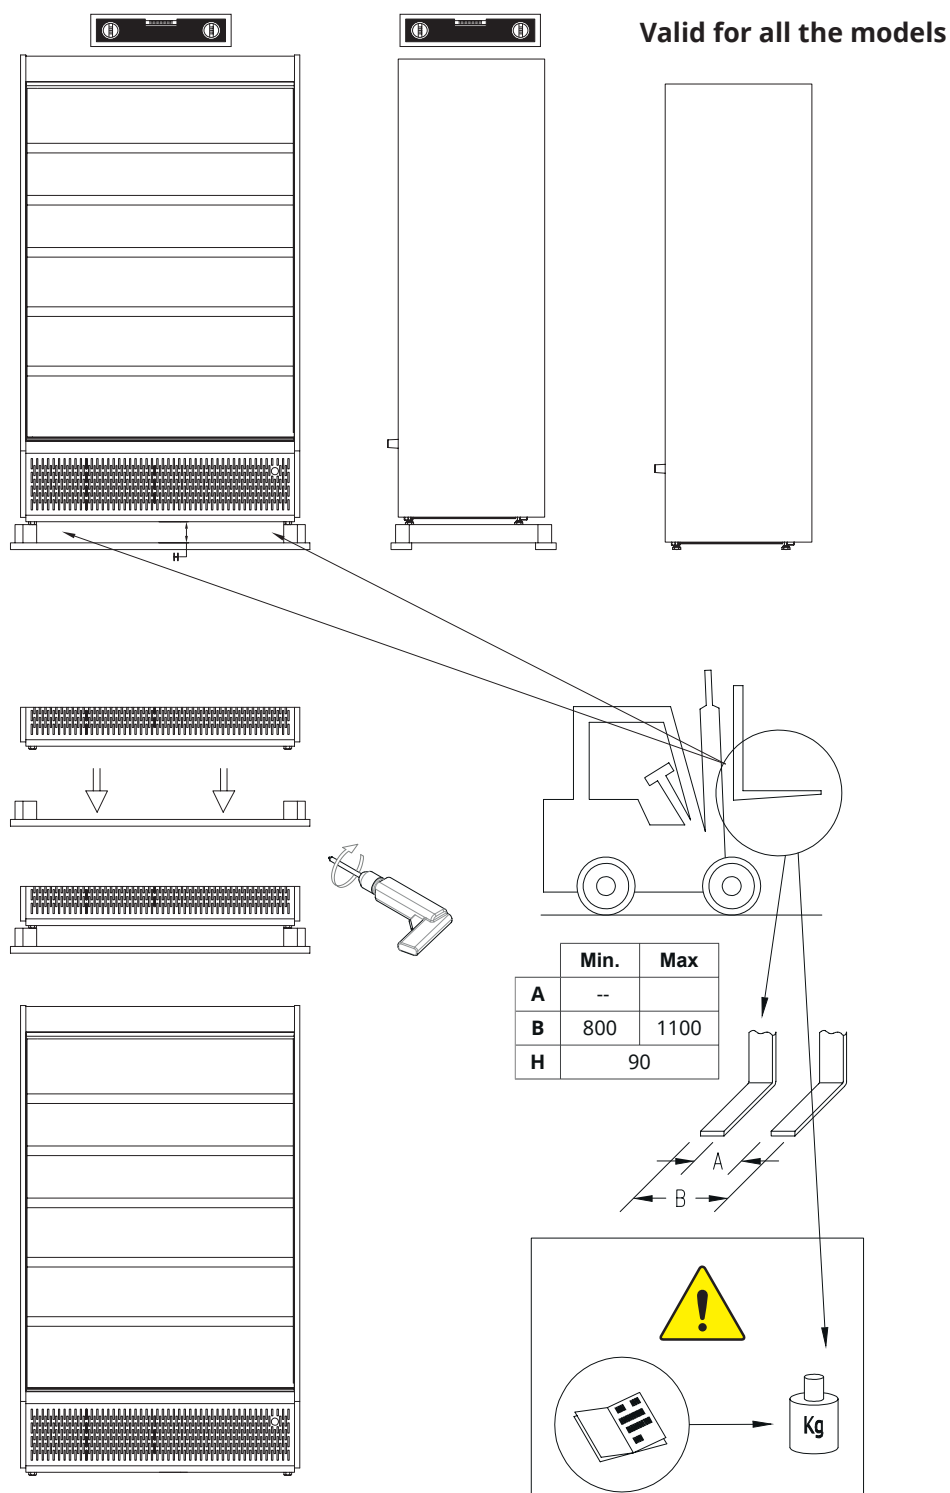

12.2 ENVIRONMENTAL CONDITIONS



ATTENTION

A dry room that can be ventilated is the suitable location for the appliance's installation. There should be a good air flow around the compressor/condensing unit. Therefore the area around the unit should not be obstructed by boxes or other objects. Place the equipment away from sources of heat (radiators, heaters of any kind, etc.) and far from the influence of continuous air movement (caused by fans, air conditioning units, etc.). If it is unavoidable to install near a heat source, use a suitable insulating plate. Also avoid exposure to direct solar irradiation; all of this causes the temperature inside the refrigerated compartment to rise with negative consequences on operation and energy consumption. Do not use the appliance outdoors and do not leave it exposed to rain.

12.3 ELECTRICAL CONNECTION



ATTENTION

Check that the network voltage matches the one displayed on the identification plate of the appliance, and that the power is adequate. Check on the socket that the power supply voltage provides rated voltage ($\pm 10\%$) when you start up the compressor. The plug should be directly connected to the electrical socket. It is forbidden to connect the plug to the socket by means of multiple socket extensions or adaptors. The plant power supply socket must be fitted with a disconnection device from the mains electricity (dimensioned to the load and in compliance with Standards in force), which guarantees complete disconnection in category III (3) over-voltage conditions and therefore protects the circuits against earth faults, overloads and short circuits. Do not route the electricity cable in passageways.



ATTENTION

Remember that **earthing** is necessary and **is a requirement imposed by law**.


12.4 POSITIONING

12.4.1 LEVELLING FEET



ATTENTION

The equipment is fitted with height-adjustable levelling feet; after positioning, it is **absolutely essential to level the equipment** on the floor.

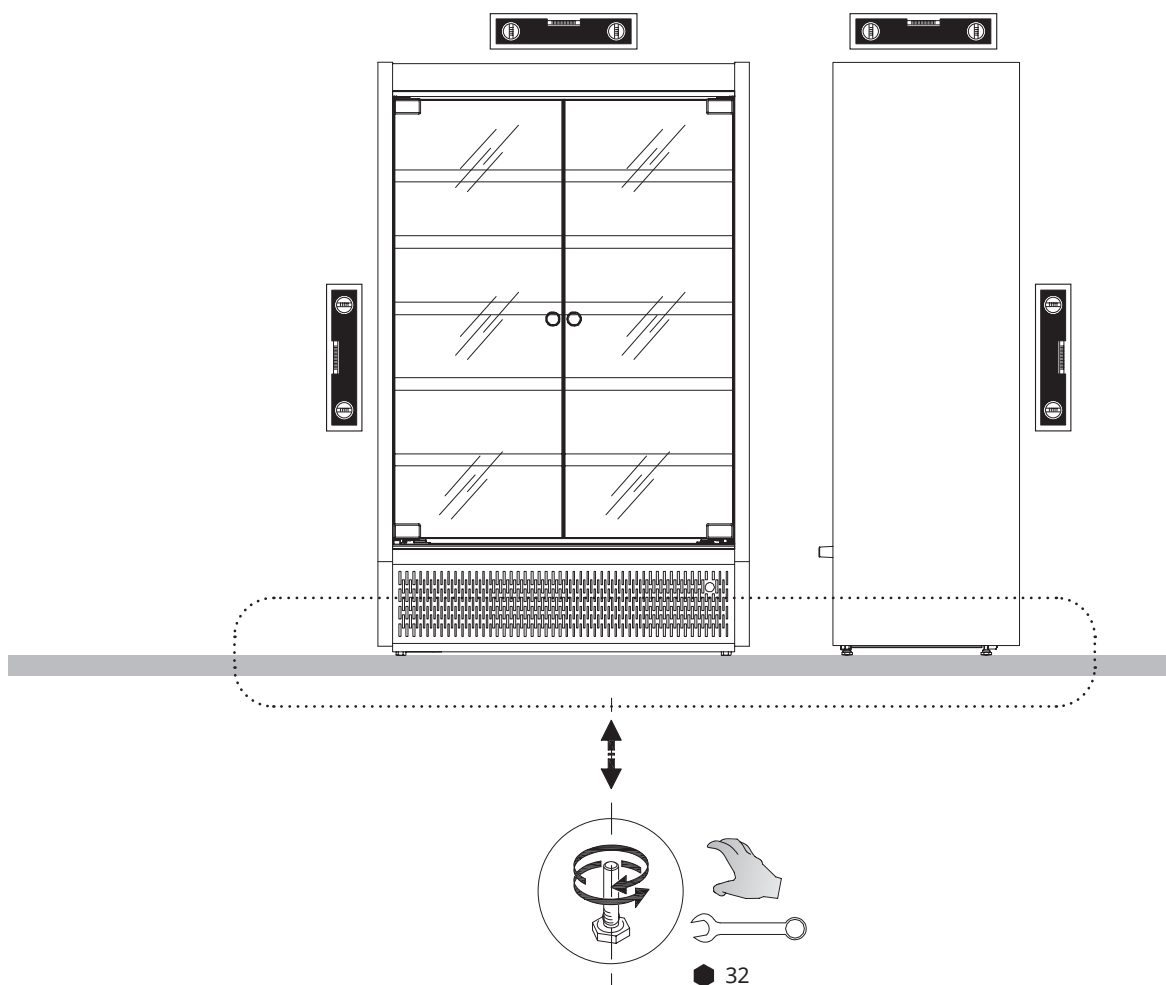


12.4.2 CASTOR WHEELS WITH BRAKE (OPTIONAL)



ATTENTION

Stabilising the equipment on the floor after positioning is **mandatory**.

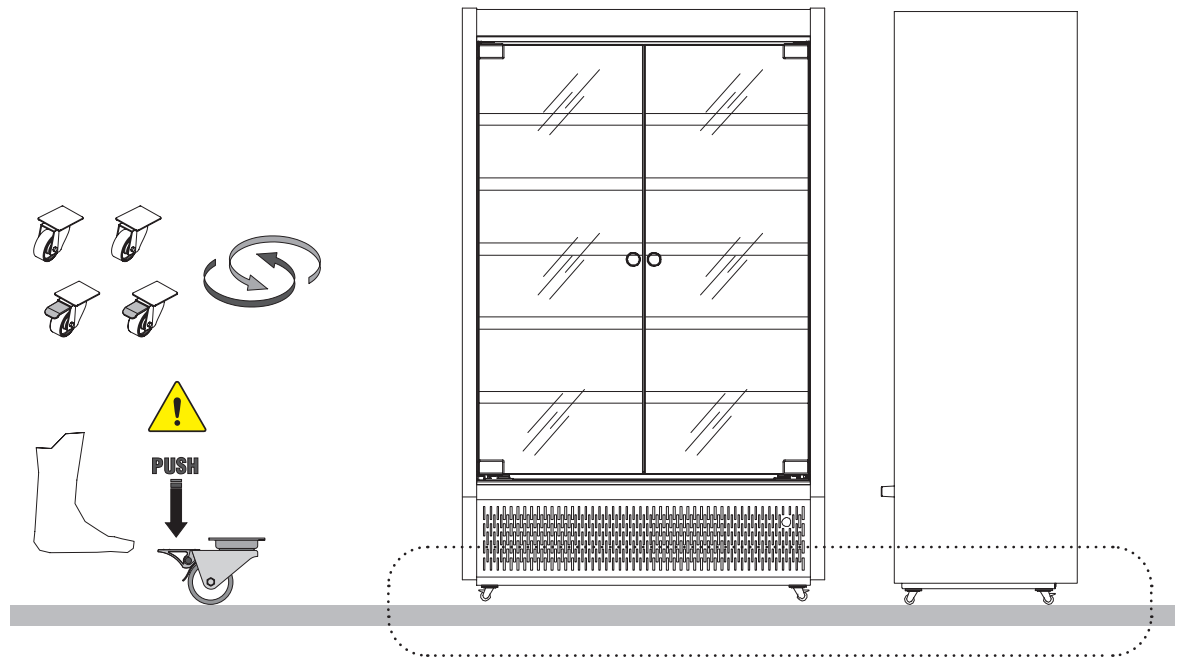


12.5 WALL MOUNTING



ATTENTION

It is fundamental to respect the distances indicated (mm) for correct installation of the appliance.
It is **essential** to install the relevant rear spacers provided.

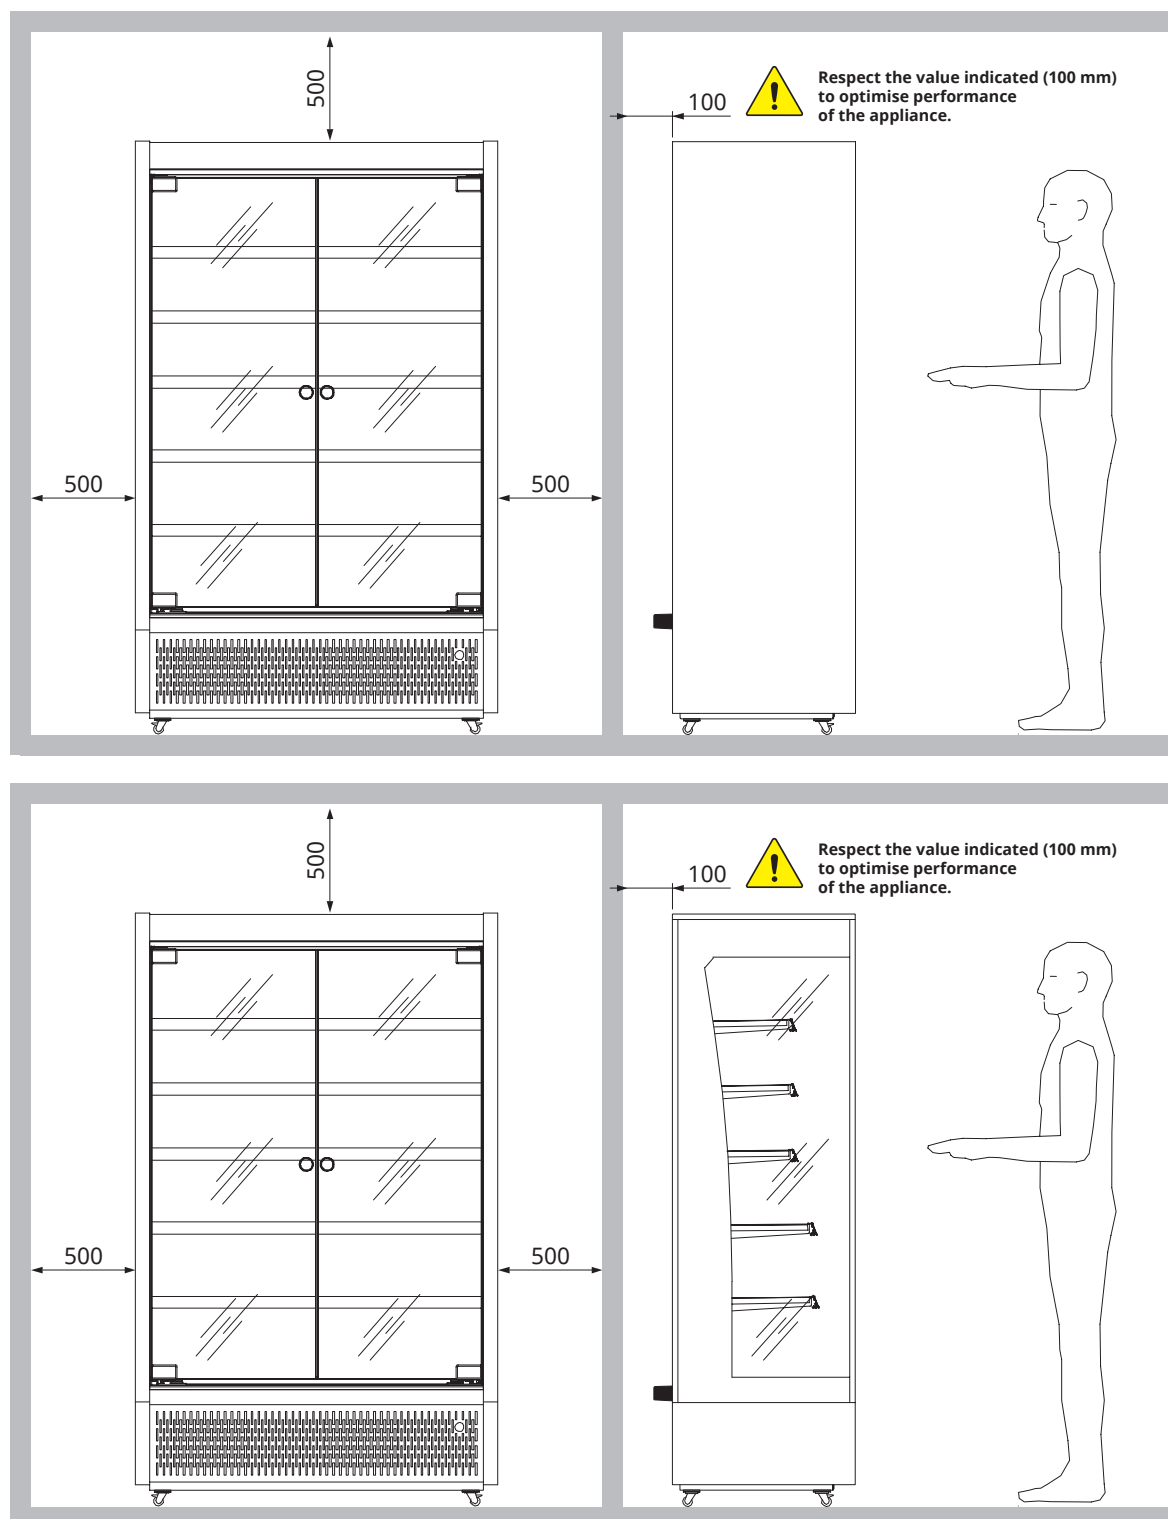



SELF-WINDING MANUAL BLIND



ATTENTION

ATTENTION

Open and close manually without forcing and ensure complete / correct closing; incomplete / incorrect closure negatively impacts the performance of the equipment and on the excessive accumulation of ice on the inner walls.

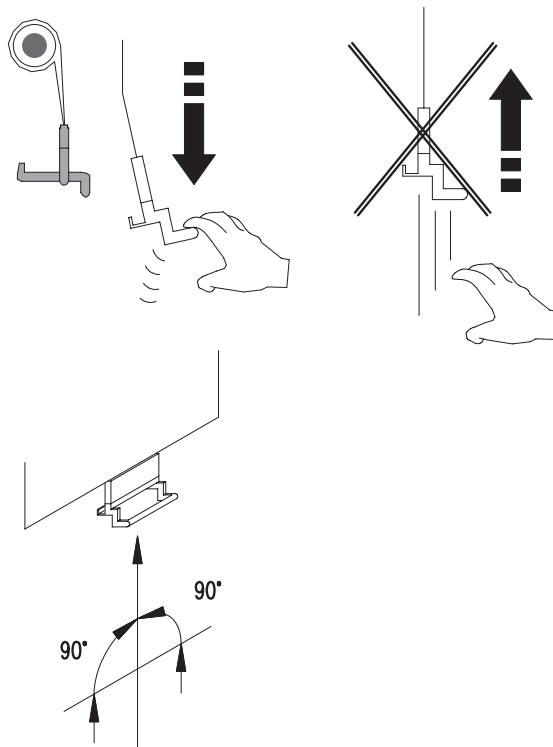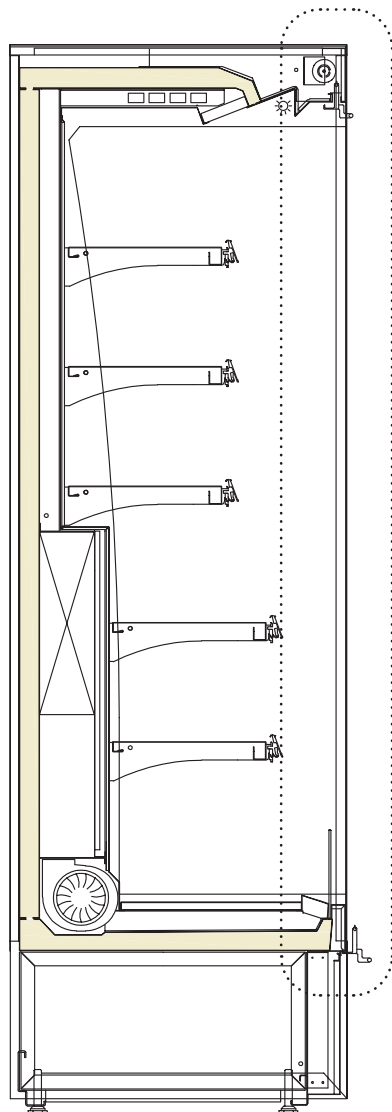

13. COMPOSITION

The appliance consists of a single cabinet, on which are installed all the devices necessary to make it a product that is professional and efficient for its declared use.

The appliance consists of:

Refrigeration	Ventilated
Installation	Plug-in - Extractable condensing unit
	Remote condensing unit (optional)
Control panel	Electronic
Adjustable display shelves	
	OPEN Upper LED
	Shelf LED (optional)
Lighting	SGD Upper LED
	Shelf LED (optional)
	GD Vertical LED
	OPEN Self-winding manual blind
Closing	SGD Single glass doors
	GD Double glazed doors
Handling	Height adjustable feet
	Swivel casters with brake (optional)
Automatic system for condensed water evaporation	Plug.in Only



OPEN



SGD



GD